FASTUS

* FASTUS is a product brand of OPTEX FA.

IO-Link Compatible Non-Contact Thermometer

TI-S Series

Measurement range: –40 to +500°C

Sensor Head TI-S30

Controller TI-SC (E)

IO-Link

High-Speed & High-Accuracy Non-Contact Thermometer with Visible Field of View

Unique Technology Equipped with a ring laser marker to improve work efficiency

First in Industry Measured temperature can be checked in a trend graph

Improved Performance High-accuracy measurement: ±1°C
Response time: Achieves 50 ms or less



OPTEX FA CO., LTD.



Performance and ease of use to meet your needs in the field
A new standard for non-contact thermometers

[Easy adjustment]

First in Industry Ring laser marker for easy positioning

A ring laser marker is installed as standard. The ring laser marker visually indicates the measurement position and measurement field of view.
This allows you to make position adjustments easily while checking the measurement field of view, even in dark and small spaces. (Patent pending)

IO-Link communication supported IO-Link

IO-Link enables bidirectional communication between the controller level and device level on a point to point basis. The measured temperature can be monitored directly as digital values without analog conversion.

[High performance]

High-accuracy measurement ±1°C

Measurement can be performed with an accuracy of ±1°C. This thermometer can also meet stringent measurement requirements.
* Measurement range: 1 to 200°C

High speed


Achieves response times of 50 ms or less (high speed) with 90% response. So it is also effective for applications such as measuring the temperature of objects on a production line.
Edge detection allows for immediate detection when rapid temperature changes occur.

Applications

Detecting presence of hot-melt adhesive



Evaluating solar panel lamination

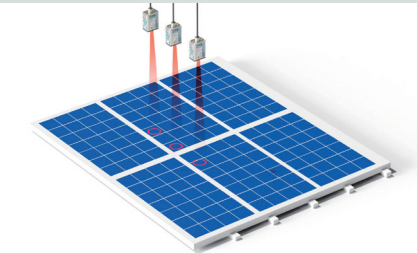

Measuring temperature of chamber top plate



Flexible installation and easy operation

[Sensor Head]

Compact design

The compact (49 × 35 × 23 mm) size allows for installation even in small spaces.

Environmental resistance

Heat resistance up to an ambient temperature of 80°C (70°C when using the laser marker), and IP67 degree of protection.

Easy-to-understand indicators

Errors, warnings, and operating status are indicated by two indicators.




[Controller]

1.8-inch full color TFT LCD


It is possible to display English, Simplified Chinese, and Japanese, which could not be reproduced with a conventional 7-segment LED display. This also allows settings to be configured easily.

Screen display can be rotated

The controller screen display can be rotated 360° in 90° increments, so the controller can be installed without worrying about the installation direction.

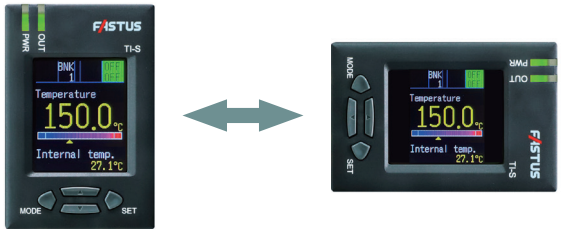

Measuring temperature of plastic

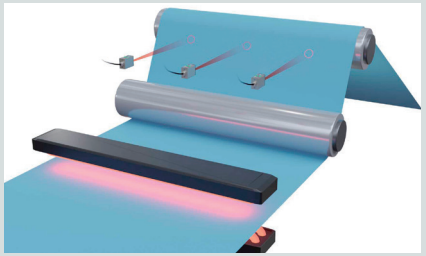

Controlling heating time in tire vulcanization processes

Measuring temperature in rubber extrusion processes



Wide-ranging interface and measurement functions




Visible from status display of sensor head

Edge detection

Detection of rapid temperature changes

Edge detection is provided, and detects when rapid temperature changes occurred. It is possible to only detect errors caused by temperature changes occurring within a short period of time.

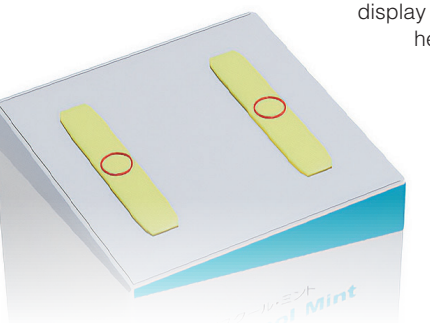


Analog output

For analog output, current output (4 to 20 mA) and voltage output (0 to 10 V) can be selected.
It can be used without selecting an input device.

Alarm output

(upper/lower limit settings)

A designated temperature range can be set as the threshold, and an alarm can be output when the measured temperature is outside of that range.






First in Industry


Trend graph

A trend graph of the measured temperature can be displayed covering up to 24 hours.



Head internal temperature display

In addition to the temperature of the measurement target, the head internal temperature is also continuously displayed. This allows use while checking the effects of the ambient temperature.

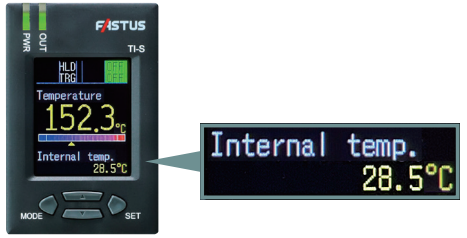


Best in class in industry

Stable measurement with respect to ambient temperature fluctuations


Temperature measurement in heating and cooling processes often involves changes in the temperature at the installation environment.
With the TI-S Series, stable continuous measurement is achieved compared with the previous model, even if the ambient temperature fluctuates.

Temperature fluctuations of environment: Within ±0.25°C/°C

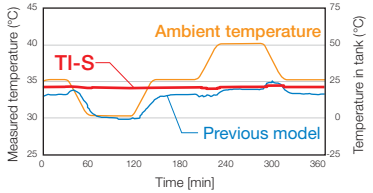

Bank function (4 channels)


4 ch are installed for the bank function which can select (call) setting contents. The settings can be easily changed when the measurement condition changes.



Up to four patterns can be saved for banks 1 to 4.


Maintenance alarm

Notification of maintenance timing can be provided when the preset period has elapsed for the timing of optical system cleaning, calibration, or other maintenance.



Presetting of maintenance timing


Notifies by blinking



Notified automatically when the set time has elapsed.

IO-Link communication supported IO-Link

System overview

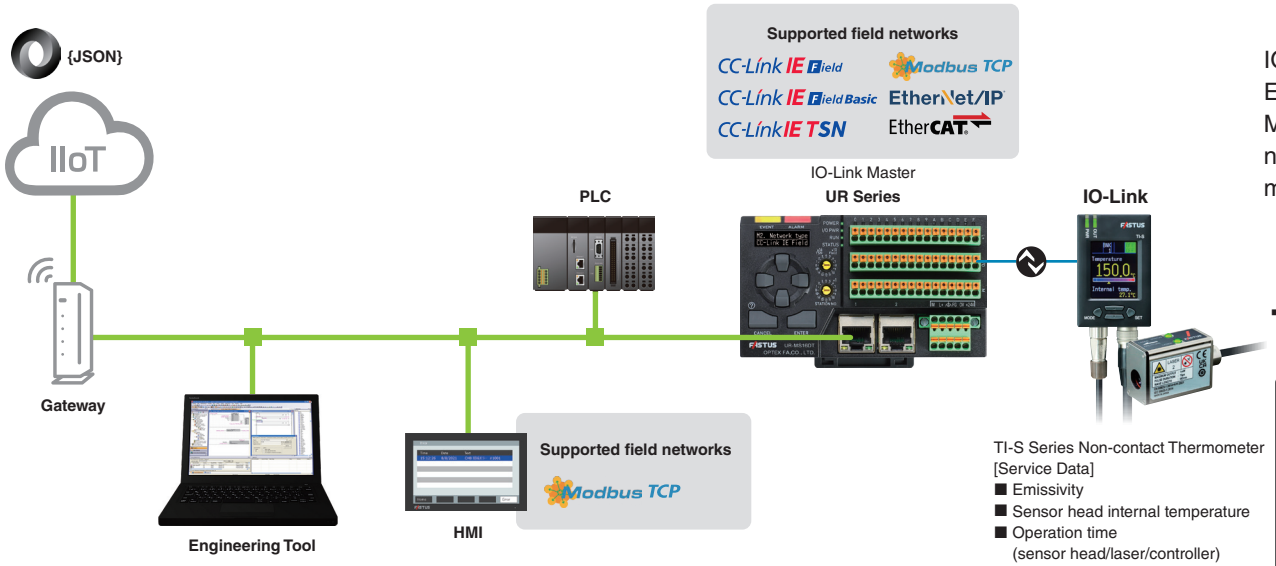

IO-Link is a technology that connects sensors and actuators to Industrial Ethernet using digital signals to promote smart factories. Measurements can be obtained directly as digital values, reducing the need for analog input. Noise resistance, cost reduction, and predictive maintenance are achieved.

Three advantages of introducing IO-Link

Advantage 1

Device information status monitoring leads to predictive maintenance and reduced downtime.


Advantage 2

The storage of device information allows for immediate restoration even if the device is replaced, improving maintainability.

Advantage 3

Converts measured value to digital signals for transmission to PLC, making them resistant to noise and enabling long-distance communication.

■ Field of view (Unit: mm)

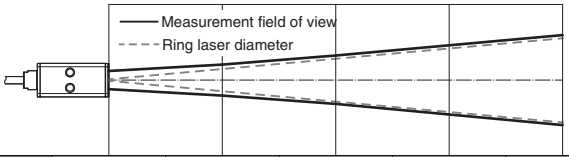


Distance	0	250	500	750	1000
Field of view	ø12	ø21	ø30	ø45	ø60
Ring laser diameter	ø1	ø15	ø30	ø45	ø60


■ I/O circuit diagrams

General-purpose I/O cable

NPN setting

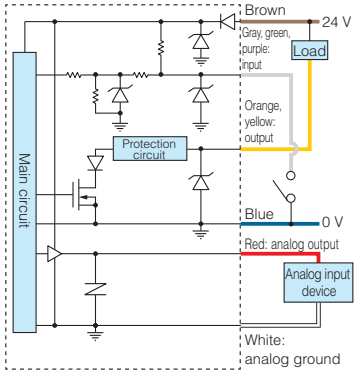

PNP setting

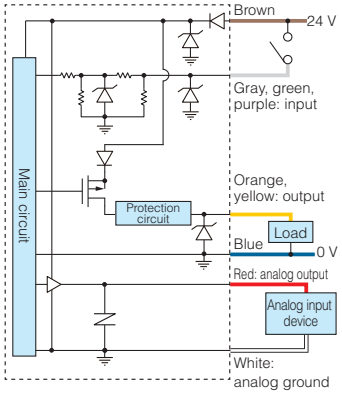

Lead wire functions

Wire color	Description
Brown	+V (24 VDC)
Gray	Laser control input
Green	Hold input/bank select*
Purple	Trigger input/bank select*
Orange	Upper limit alarm output
Yellow	Lower limit alarm output
Blue	Ground (0 V)
Red	Analog output
White	Analog ground


* Operates as bank select input when Measurement mode is set to Normal.

Lead wire functions during bank select

Bank number	Lead wire color	
	Green	Purple
1	OFF	OFF
2	OFF	ON
3	ON	OFF
4	ON	ON

IO-Link cable

IO-Link connection



IO-Link cable lead wire/ connector pin functions

No.	Wire color	M12 connector pin No.	Description
①	Brown	①	L+
②	-	-	*1
③	Black	④	C/Q
④	Blue	③	M

*1 The input line is replaced with process output data.


M12 connector pin No.




* ② is not used.

Dimensions (Unit: mm)

Sensor head

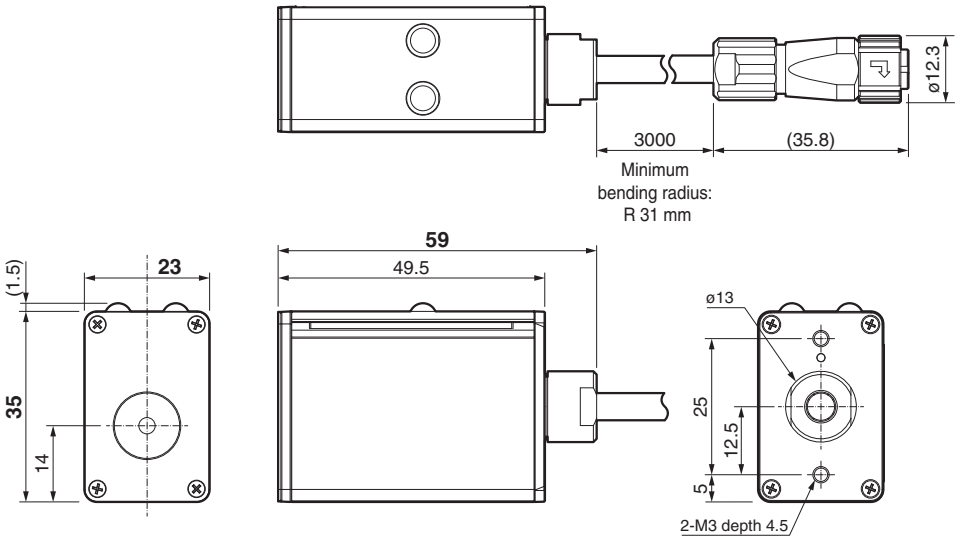


Controller

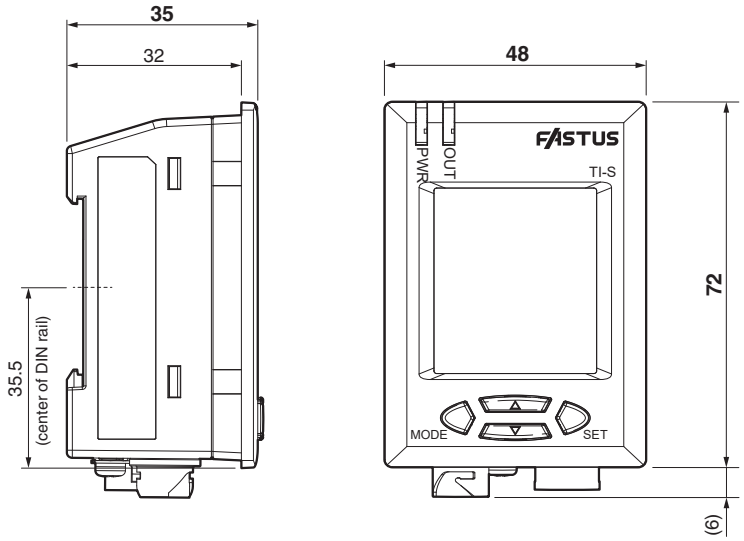


Connection cable (Option)


General-purpose I/O cable: TI-SCA09-G3K
Minimum bending radius (Stationary position): R 42 mm

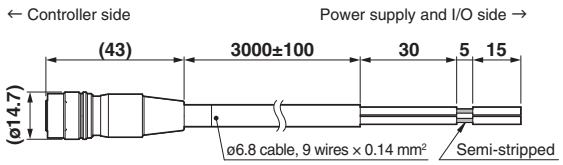

IO-Link cable: TI-SCA03-G3K
Minimum bending radius (Stationary position): R 42 mm

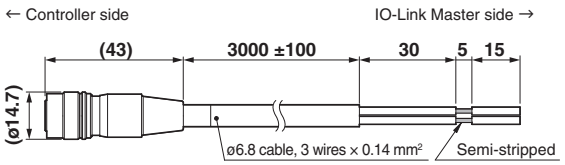

IO-Link cable: TI-SM1203-G03K
Minimum bending radius (Stationary position): R 42 mm

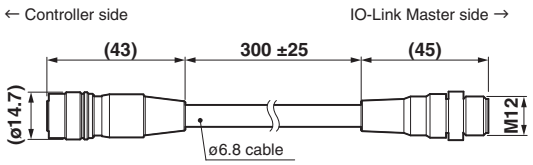

* For the dimensions of the extension cable and mounting brackets, refer to the OPTEX FA website.

Options

Connection cables

* The controller does not come with a cable to connect an external device.
To connect the controller with an external device, please purchase one of the following connection cables.

General-purpose I/O cable
TI-SCA09-G3K Open-end cable

IO-Link cable
TI-SCA03-G3K Open-end cable
Minimum bending radius (Stationary position): R 42 mm



IO-Link cable
TI-SM1203-G03K
M12 4-pin plug
Minimum bending radius (Stationary position): R 42 mm




Extension cables

Extension cable connecting the head and controller
TI-SSA06-G3K (Cable length: 3 m)
TI-SSA06-G10K (Cable length: 10 m)
Minimum bending radius (Stationary position): R 31 mm



Black body tape for non-contact thermometer

HB-250
Heat resistance temperature: 250°C
Tape width: 60 mm, Tape length: 2 m



Mounting brackets

For controller
BKT-OPPD
(Panel mounting bracket)



For sensor head
BEF-TISH-B
(Floor mounting bracket)



For sensor head
BEF-TISH-A
(Wall mounting bracket)




For sensor head
BEF-TISH-AB
(2-axis mounting bracket)



Product calibration

The non-contact thermometers of OPTEX FA are calibrated based on our traceability system using a standard traceable to national standards. OPTEX FA can carry out periodic calibration (for a fee) after purchase. If you require calibration certificate documents, we provide a set of three documents: Certificate of Calibration, Report of Calibration, and Traceability Chart.

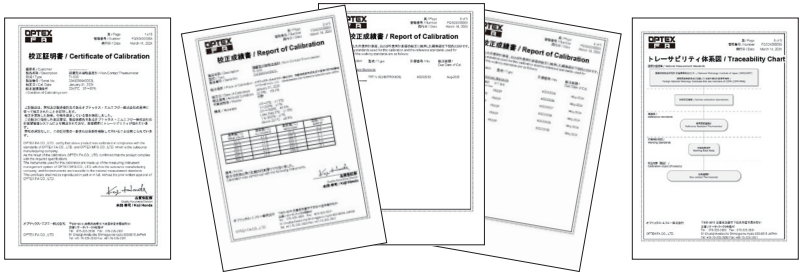

Sensor head and controller can be replaced individually

The thermometer function is self-contained in the sensor head, so there is no need to calibrate the controller.




Specifications

[Sensor Head]

Model		TI-S30
Measurement range		−40 to +500°C
Field of view		ø30 mm at 500 mm
Optics		Silicon lens
Sensing element/spectral response		Thermopile 8 to 14 µm
Response time (operating mode)		High speed response, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s, 5 s, 10 s, 20 s * Output response 90%*1
Accuracy*2		−40 to 0°C: ±1.5°C +1 to +200°C: ±1°C +201 to +500°C: ±0.5% of reading value
Repeatability		±0.5°C (when operating mode is 100 ms)
Temperature drift		Within ±0.25°C/°C
Emissivity adjustment		0.100 to 1.200
Supply voltage		5 VDC (Supplied from controller)
Current consumption		30 mA or less/5 VDC
Connection type		Pigtail cable 3 m
Minimum bending radius		R 31 mm
Total cable length		Maximum 13 m (pigtail cable 3 m + extension cable 10 m)
Laser marker	Medium	Red semiconductor laser
	Wavelength	663 nm
	Maximum output	1 mW
Laser class (JIS/IEC/FDA)*3		CLASS 2
Environmental resistance	Degree of protection	IP67 (IEC 60529)
	Ambient temperature	0 to +80°C (up to +70°C during laser emission)
	Ambient humidity	35 to 85% RH (no condensation)
	Storage temperature	−20 to +80°C
	Vibration resistance	10 to 55 Hz Double amplitude 1.5 mm 2 hours in each of the X,Y and Z directions
	Shock resistance	500 m/s² (Approx. 50 G) 3 times in each of the X,Y and Z directions
Applicable regulations	EMC	EMC Directive (2014/30/EU) UK EMC (The Electromagnetic Compatibility Regulations 2016) FCC Part 15 subpart B
	Environment	RoHS Directive (2011/65/EU), China RoHS (MIIT Order No. 32) UK RoHS (The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012)
	Safety	FDA Regulation (21 CFR 1040.10 and 1040.11*4)
Applicable standards		EN/IEC 61326-1
Material		Case: Aluminum, Front plate: Stainless steel
Weight		Approx. 180 g (including connector cable)

*1: The response time is the time it takes for the output change to reach 90%.
*2: Measurement conditions: Emissivity; 1.000, Ambient temperature; 23 ±5°C, Size of the measurement target; sufficiently larger than the field of view.
*3: In accordance with the FDA provisions of Laser Notice No. 56, the laser is classified per the IEC 60825-1:2014 standard.
*4: Excluding differences per Laser Notice No. 56.
*5: To convert temperature values such as measurement temperature range and accuracy to Fahrenheit temperature, use (Fahrenheit temperature = Celsius temperature x 1.8 + 32).
*6: To convert relative values such as repeatability and temperature drift to Fahrenheit temperatures, use 1°C = 1.8°F.





[Controller]

Model			TI-SC (E)
Rating	Supply voltage		24 VDC ±10% (when using a general-purpose I/O cable) 18 to 30 VDC (when using an IO-Link cable)
	Current consumption		180 mA (when using a general-purpose I/O cable)*1 50 mA (when using an IO-Link cable)
Display resolution			0.1°C/°F
Temperature unit			Celsius "°C"/Fahrenheit "°F"
Measurement mode			Normal/Sample hold/Peak hold/Valley hold/Edge detection
Response time (operating mode)			High speed/50 ms/100 ms/200 ms/500 ms/1 s/2 s/5 s/10 s/20 s Output response 90%*2
Analog output/ IO-Link update time			High speed: 2.5 ms 50 ms to 2 s: 5.0 ms 5 s to 20 s: 100 ms
Analog output	Resolution		10,801 steps
	Accuracy	Voltage	±0.2% of F.S. (at ambient temperature of 25°C) Temperature coefficient (typical): ±22 ppm/°C (±0.0022%/°C)
		Current	±0.2% of F.S. (at ambient temperature of 25°C) Temperature coefficient (typical): ±4 ppm/°C (±0.0004%/°C)
Indicator	Display		1.8-inch TFT LCD Display language: English, Simplified Chinese, Japanese
	Power indicator		When power is ON: lights in green, IO-Link communication: blinks in green
	Output indicator		Normal measurement alarm output is OFF: lights green Normal measurement alarm output is ON: lights red When minor warning occurs: blinks green When major warning occurs: blinks orange When error occurs: blinks red
Interface	Alarm output		NPN/PNP open collector (selectable by setting) 1 output: Max. 100 mA, 2 outputs: Max. 100 mA Residual voltage NPN: 1.6 V or less, PNP: 3.4 V or less
	Output mode		N.O./N.C.
	External input		Laser off, Hold, Trigger
	Analog output	Current	4 to 20 mA load impedance: 150 to 500 ohm
		Voltage	0 to 10 V output impedance: 200 ohm or less
Timer mode			One shot/delay (ON delay, OFF delay) One shot: 0.01 to 10.00 sec, Delay: 0.00 to 10.00 sec
IO-Link	Revision		1.1.3
	Baud rate		COM 3 (230.4 kbps)
	Number of process input data bytes		4 bytes
	Number of process output data bytes		1 byte
	Minimum cycle time		0.5 ms
	Data storage class		Data Storage Class 1: automatic DS

Model			TI-SC (E)
Connection type	General-purpose I/O cable		3 m cable 9 wires, Minimum bending radius: R 42 mm
	IO-Link cable	Open-end	3 m cable 3 wires, Minimum bending radius: R 42 mm
		M12 4-pin connector	0.3 m cable, Minimum bending radius: R 42 mm
Environmental resistance	Degree of protection		IP40 (IEC 60529)
	Ambient temperature		0 to +50°C
	Ambient humidity		35 to 85% RH (no condensation)
	Storage temperature		−20 to +70°C
	Vibration resistance		10 to 55 Hz Double amplitude 1.5 mm 2 hours in each of the X,Y and Z directions
	Shock resistance		500 m/s² (Approx. 50 G) 3 times in each of the X,Y and Z directions
Applicable regulations	EMC		EMC Directive (2014/30/EU) UK EMC (The Electromagnetic Compatibility Regulations 2016) FCC Part 15 subpart B
	Environment		RoHS Directive (2011/65/EU) UK RoHS (The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012) China RoHS (MIIT Order No. 32)
Applicable standards			EN/IEC 61326-1
Material			Case: ABS
Weight			Approx. 80 g

*1: Includes alarm output load current and analog output current.
*2: The response time is the time it takes for the output change to reach 90%.
*3: To convert temperature values such as measurement temperature range and accuracy to Fahrenheit temperature, use (Fahrenheit temperature = Celsius temperature x 1.8 + 32).
*4: To convert relative values such as repeatability and temperature drift to Fahrenheit temperatures, use 1°C = 1.8°F.

● Specifications are subject to change without prior notice.

OPTEX FA CO., LTD.
91 Chudoji-Awata-cho, Shimogyo-ku, Kyoto 600-8815 JAPAN
TEL. +81-75-325-1314 FAX. +81-75-325-2936
https://www.optex-fa.com